MOEN®

DESCRIPTION

- Brass swivel ball assembly (for 220R5 and 220R5EP series)
- 1/2" NPT connection (for 220R5 and 220R5EP series)
- 1/2" IPS connection (for 220R4EP series)

OPERATION

 Infiniti[™] dial allows users to precisely adjust to their preferred balance of force and coverage

FLOW

- Flowrate for non-EP models are limited to 2.5 gpm (9.5 L/min) max
- Flowrate for EP suffix models are limited to 1.75 gpm (6.6 L/min) max

STANDARDS

- Third party certified to meet: ASME A112.18/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- EP suffix models are compliant with California water efficiency regulations

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year limited warranty when used in a commercial installation
- 10 year limited warranty when used in a multifamily installation
- \bullet Visit www.moen.com/support for complete details and limitations


SPECIFICATIONS



Verso™ Square Rainshower with Infiniti[™] dial

MODELS: 220R4EP series, 220R5EP series, 220R5 series



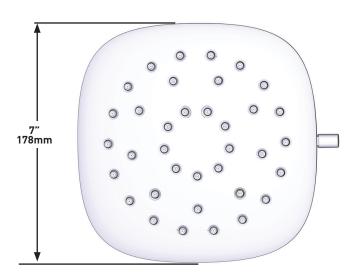



CRITICAL DIMENSIONS DO NOT SCALE